

QUARRY TEXTURES™

The unglazed, textured surface makes these pavers naturally stain- and slip-resistant. Available in six rustic color-through choices, Quarry Textures is the perfect choice for both residential and commercial floors.

Field tile



DIABLO RED 0T01 (1)



ASHEN GRAY 0T03 (2)




ADOBE BROWN 0T05 (2)




SAHARA SAND 0T08 (2)



DESERT TAN 0T09 (2)

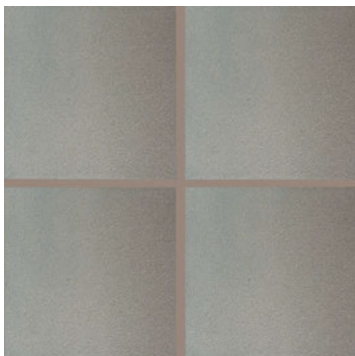

ASHEN FLASH 0T04 (2)

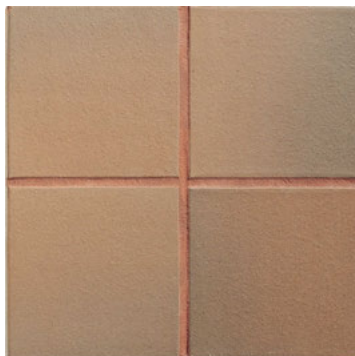

ADOBE FLASH 0T06 (2)



RED FLASH 0T02 (1)

(1) and (2) indicate Price Groups, (1) being the least expensive.

Abrasive grain available in 6 x 6 and 8 x 8 sizes in 0T01, 0T03, 0T05, 0T08, 0T09 and 0T11 colors only.



SIZES

		SQ. FT. CARTON	PCS. PER CARTON
6 x 6 Field Tile	(6" x 6") (15.2 cm x 15.2 cm)	11.00	44
8 x 8 Field Tile	(8" x 8") (20.3 cm x 20.3 cm)	11.00	25

RESIDENTIAL USAGE

FLOORS	WALLS	COUNTERTOPS	EXTERIOR PATIOS	EXTERIOR POOL DECKS
F	W	C	EP	ED*

* Abrasive grain only.

COMMERCIAL USAGE

	INTERIOR			EXTERIOR	
	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL	RESIDENTIAL	COMMERCIAL
Floors/Patios	✓	✓	✓	✓	✓
Walls/Backsplashes	✓	✓	✓	✓	✓
Countertops	✓	✓	✓	✓	✓
Pool Decking*	✓	✓	✓	✓	✓
Pool Linings	✓	✓	✓	✓	✓

Suitable for exterior floors, including pool decks, and walls in freezing and non-freezing climates when proper installation methods are followed.

Suitable for industrial installations requiring high compressive strength.

* Abrasive grain only.

INSTALLATION

THICKNESS	GROUT JOINT RECOMMENDATION
1/2"	3/8"

NOTES

We do not recommend light colored quarry tile in commercial kitchens unless properly sealed. It is necessary to follow the proper procedures and recommendations from the grout and maintenance products manufacturers.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the tile surface.

Suitable for use on ramps when ordered with abrasive.

Since there is shade variation in all natural products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection.

For additional information, refer to "Factors to Consider" at <http://daltile.com/factors-to-consider.cfm>.



All or selected items within this series are made in the USA. For more information visit www.daltile.com/QuarryTextures

TRIM

TYPE	NUMBER	SIZE	PCS. PER CARTON
Bullnose	Q-1665*	6 x 6	44
Bullnose Corner	QCRL-1665*	6 x 6	44
Cove Base**	Q-3565^	5 x 6	44
Cove Base Outcorner	QCR-L-3565*^■	5 x 6	20
Cove Base Inside Corner	QB-3565^	1 x 5	25
Cove Base**	Q-3585^	5 x 8	24
Bullnose	Q-1885	8 x 8	25
Bullnose Corner	QCRL-1885	8 x 8	25


* Available in abrasive grain

** Cove Base trim is intended to coordinate with floor field tile in the standard 90-degree installation position.

^ Not available in Flash colors; use coordinating solid color.

■ Special Order

SHADE VARIATION



DYNAMIC C.O.F. (WET) : 2

The higher the rating, the higher the slip resistance.

1 < 0.42

2 ≥ 0.42

STATIC C.O.F. (WET) : 2

1 0.50 - 0.59

2 ≥ 0.60

TEST RESULTS

	ASTM#	RESULT (Non-Abrasive Grain)	RESULT (Abrasive Grain)
Water Absorption	C373	< 3.0%	< 3.0%
Breaking Strength	C648	> 400 lbs	> 400 lbs
Scratch Hardness	MOHS	7.0	7.0
Chemical Resistance	C650	Resistant	--
Dynamic C.O.F.	A137.1	≥ 0.42	≥ 0.42
Static C.O.F.	C1028	Wet: ≥ 0.60 Dry: ≥ 0.70	Wet: ≥ 0.60 Dry: ≥ 0.80

Dynamic C.O.F. (Wet) value as measured by the DCOF AcuTest™ helps to assess a product's suitability for a commercial environment. For more information, visit our website at www.daltile.com/DCOF.

